


LTR		DESCRIPTION	DATE	APPROVED
A	NEW RELEASE		05/18/94	H.T.

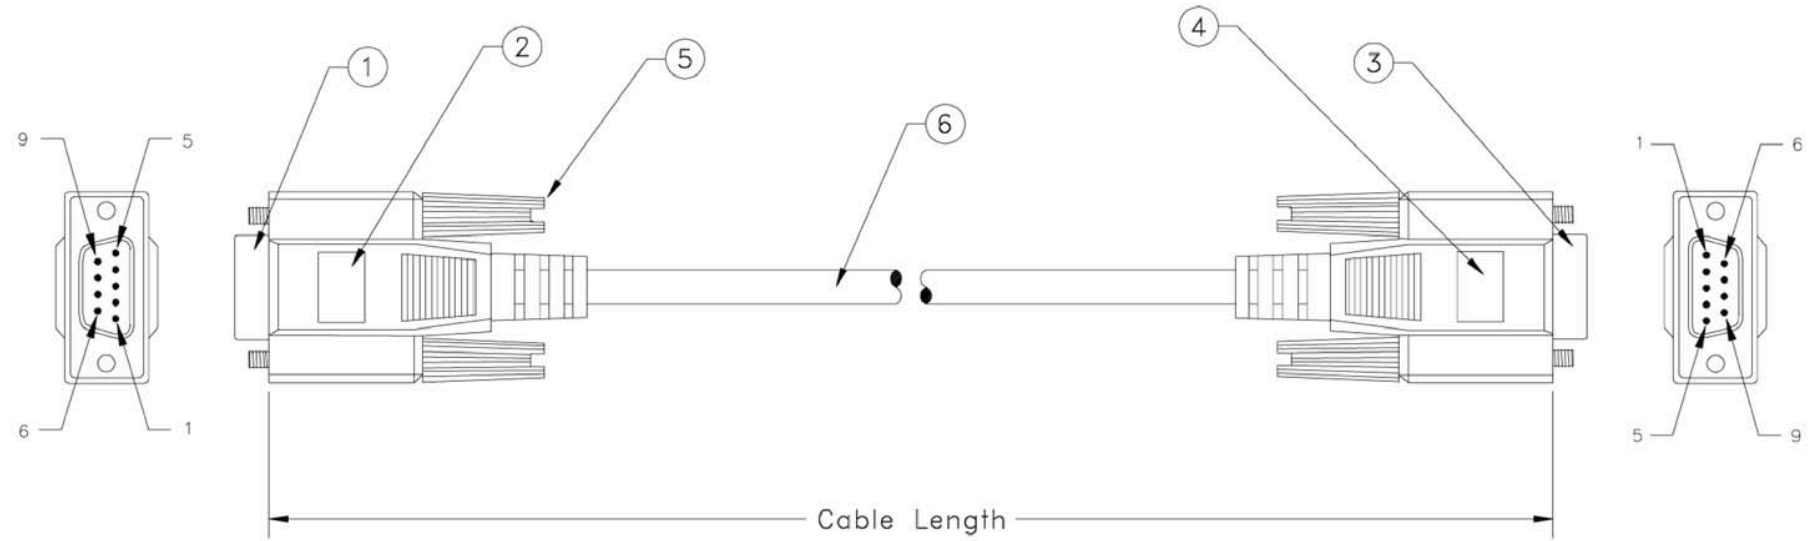

**Pin Assignment**

DB 9 Female	DB 9 Female
1	4
6	
2	3
3	2
4	6
	1
5	5
7	8
8	7
G	G

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD.	UNIT
6.	28 AWG., 7 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.

**CABLE ASSEMBLY PARTS LIST**

UNLESS OTHERWISE SPECIFIED:  
 1. DIMENSION ARE IN INCHS  
 2. TOLERANCES:  
 DECIMALS X.XX ±0.25  
 3. DO NOT SCALE DRAWING  
 4. REMOVE ALL BURRS AND  
 BREAK SHARP EDGES.

PROPRIETARY DOCUMENT  
 THIS DRAWING AND/OR INFORMATION OR  
 SUBJECT MATTER CONTAINED HEREIN,  
 SHALL NOT BE USED, COPIED OR  
 DISSEMINATED IN ANY MANNER, OR FOR  
 ANY PURPOSE, OTHER THAN AS  
 EXPRESSLY STATED BY

CUSTOMER	
R.F.O. NO.	
DRAWN	DATE
Howie Tseng	05/18/94
CHECKED	
CUSTOMER APPROVAL	

TITLE			
Null Modem Cable Assembly (DB9, F/F, 7C, Molded)			
SIZE	DWG NO.	PART NO.	REV.
	NU33-XX	NU33-XX	A
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1 OF 1	