




1. 25mm (. 049") HOUSING

MATERIAL

Insulator: Nylon 66 UL 94V-0
Color: White

SPECIFICATIONS

Temperature range: -25°C ~ +85°C
Current rating: 1.0A
Voltage rating: 100V AC
Dielectric withstand voltage: 800V AC
Insulation resistance: 1000 MΩ min.
Contact resistance: 0.01 Ω max.

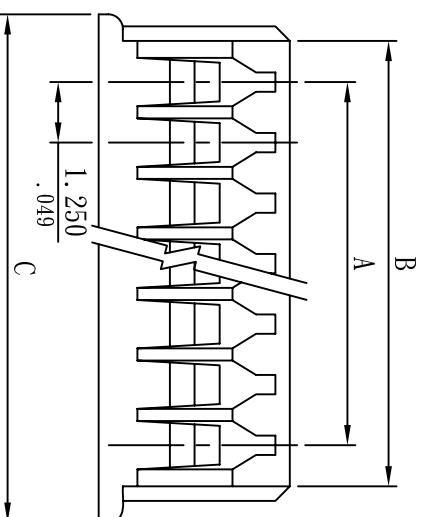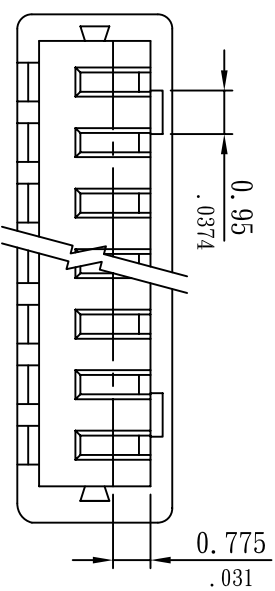

Dimensional Information

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
2	1.25(0.049)	2.95(0.116)	4.25(0.167)	9	10.00(0.394)	11.70(0.461)	13.00(0.512)
3	2.50(0.098)	4.20(0.165)	5.50(0.217)	10	11.25(0.443)	12.95(0.510)	14.25(0.561)
4	3.75(0.148)	5.45(0.215)	6.75(0.266)	11	12.50(0.492)	14.20(0.559)	15.50(0.610)
5	5.00(0.197)	6.70(0.264)	8.00(0.315)	12	13.75(0.541)	15.45(0.608)	16.75(0.659)
6	6.25(0.246)	7.95(0.313)	9.25(0.364)	13	15.00(0.590)	16.70(0.657)	18.00(0.709)
7	7.50(0.295)	9.20(0.362)	10.50(0.413)	14	16.25(0.640)	17.95(0.707)	19.25(0.758)
8	8.75(0.344)	10.45(0.411)	11.75(0.463)	15	17.50(0.689)	19.20(0.756)	20.50(0.807)



Sunny Young Enterprise Co., Ltd.

SYE <http://www.sunnyyoung.com.tw>

No. 276, Nan Yang Street, Hsi-Chih City, Taipei, Taiwan
Tel: +886 2 2694 5995(REP) Fax: +886 2 2694 3721

DWG NAME R6500-xxP (RoHS)

CHECKED

APPROVED

SCALE: 1:6
UNIT: mm (in.)

REV NO

DATE

DESCRIPTION

BY

CHECKED

TOLERANCE UNLESS NOTED

DRAWN NAME

DATE

CAD NO

2006.06.08

R6500-xxP

LINEAR±

0 ±0.30(.012)
.00 ±0.20(.008)
.000±0.10(.004)