


USB to 4 x RS232 Converter
Part no. UMC-104




DB9 Male	RS232
1	DCD
2	RXD
3	TXD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI



Industrial and commercial strength USB to 4-port RS232 converter hub optimized for Vista and Windows 7. With this unit you can easily add four serial RS232 COM ports to almost any computer with a standard USB port. Surge and static protection up to 15KV protects all four COM ports.

This converter is built around a quality FTDI processor chip which makes it the ideal choice for applications where reliability and performance is critical.

Application example:

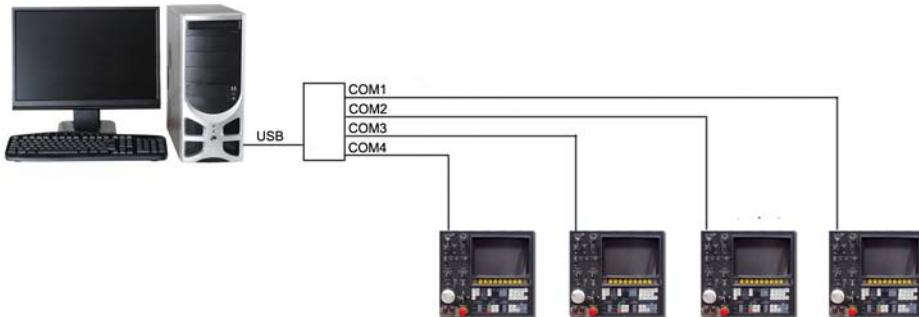

SPECIFICATIONS	
Model number	UMC-104
Operating system	Windows 98Se, ME, 2000, XP32/64, Vista 32/64, Server 2003/8 32/64, Windows 7 32/64, Win CE. Mac and Linux
Baud rate	300 – 1Mbps
Power	Port-powered from USB port
Chipset	FTDI
Interface	RS232: 4 x DB9 male connector USB: Female type B
RS232 signals	DCD, RXD, TXD, DTR, GND, DSR, RTS, CTS, RI
USB signals	VCC, DATA+, DATA-, GND, FG
Standards	Serial: EIA/TIA RS-232C USB: v1.1, (compliant with v2.0)
ESD protection	Up to 15KV, 600w/ms
Certifications	CE, FCC, RoHS
Operating Temp.	-10 to 55°C
Operating humidity	5% To 95% - No Condensation
Dimensions	5.90"(L) x 2.61"(W) x 1.02"(H)
Warranty	5-year Limited Warranty
ECCN	4A994.a
Schedule B	8471.80.1000
HTS	8517.18.0050

To access technical support, please visit the U.S. Converters website at:
www.USconverters.com
Here you will find:

- Latest drivers and updates for download
- Technical tips
- Documentation
- Configuration support
- and much more...

Feel free to contact our technical support team at mail@usconverters.com with any issues.

Copyrights © U.S. Converters